

Rec'd PCT/PTO 10 MAY 2005
PCT/IL 0 3700921
10/534455

#2



מדינת ישראל
STATE OF ISRAEL

REC'D 02 MAR 2004
WIPO PCT


Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
particulars of which are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

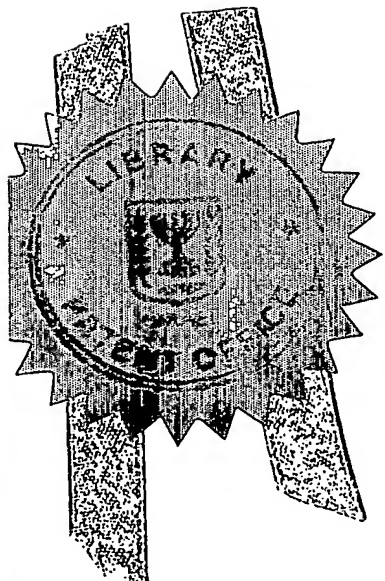

This 14-12-2003 היום
רשם הפטנטים
ממונה על הבוחרים
Commissioner of Patents

BEST AVAILABLE COPY

נתאשר
Certified

לשימוש הלשכה
For Office Use

בקשה לפטנט
Application For Patent

מספר: Number	152746
תאריך: Date	11-11-2002
הוקדם/נדחת: Ante/Post-dated	

אני, (שם המבקש, מענו ולגבי גוף מאוגדת מקום התאגדותו)
I, (Name and address of applicant, and in case of body corporate-place of incorporation)

יישום חברה לפיתוח המחקר של האוניברסיטה העברית בירושלים, חברה ישראלית מרחוב ז'בוטינסקי 46, ירושלים 92182, ישראל
Yissum Research Development Company of the Hebrew University of Jerusalem, Israeli Company of 46 Jabotinsky Street, Jerusalem 92182, ISRAEL

בעל אמצאה מכח
Owner, by virtue of

הדין
Right of Law

ששמה הוא
of an invention the title of which is

חיישן ביולוגי למולקולות

Biosensor for molecules

(בעברית)
(Hebrew)
(באנגלית)
(English)

Hereby apply for a patent to be granted to me in respect thereof. * בקשת חלוקה * Application of Division מבקשת פטנט from application No. _____ מס' _____ Dated _____ מיום _____		* בקשת מטנט מוסף * Appl. for Patent of Addition * לבקשה/לפטנט * to Patent/Apl. No. _____ מס' _____ Dated _____ מיום _____		דרישת דין קדימה * Priority Claim מספר/סימן Number/Mark תאריך Date מדינת האיגוד Convention Country	
P.O.A.: General filed in case P114692		* יפוי כח: כללי * הוגש בעניין			
המען למסירת מסמכים בישראל Address for Service in Israel C. 141099 REINHOLD COHN AND PARTNERS Patent Attorneys P.O.B. 4060, Tel-Aviv		ריינהולד כהן ושותפיו עורכי פטנטים ת"ד 4060, תל-אביב			
חתימת המבקש Signature of Applicant בשם המבקשים ריינהולד כהן ושותפיו ע"י: _____		שנת 2002 Year		בחודש 11 of היום 11 This	

לשימוש הלשכה
For Office Use

טופס זה כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, חתום אישור להגשת הבקשה שפרסיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.
* מחק את המיותר *
Delete whatever is inapplicable

חיישן ביולוגי למולקולות

Biosensor for molecules

**Yisum Research Development Company
of the Hebrew University of Jerusalem**

**יישום חברה לפיתוח המחקר של האוניברסיטה
העברית בירושלים**

C. 141099

BIOSENSOR FOR MOLECULES

FIELD OF THE INVENTION

This invention relates to a biosensor for the detection of molecules. More specifically, the present invention relates to a biosensor that incorporates an enzyme.

5 REFERENCES

Cahn, T.M. and Jackson, S.A., Biosensors, Chapman & Hall, Paris, 1991.

Coulet, P.R., "From chemical sensors to bioelectronics: a constant search for improved selectivity, sensitivity, and miniaturization", Proceedings of the scientific Computing and Automation (Europe).

- 10 Gopel, W., Heiduschka, P., Introduction to bioelectronics: interfacing biology with electronics, Biosens., Bioelectron. ,1994, iii-xiii.

- Gorchkov, D.V., Soldatkin, A.P., Poyard, S. , Jaffrezic-Renault, Martelet, N.,C., Application of charged polymeric materials as additional permselective membranes for improvement of the performance characteristics of urea-sensitive enzymatic field effect transistors: 1. Determination of urea in model solutions,
15 Mater. Sci. Eng., C 5, 1997, 23-28.

Jimenez, C., Bartoli, J., de Rooij, N.F., Koudelka-Hep, M., Use of photopolymerizable membranes based on polyacrylamide hydrogels for enzymatic microsensor construction, Anal. Chim. Acta. 351, 1997, 169-176.

- 20 Kharitonov, A.B., Shipway, A.N., Willner, I., An Au-nanoparticle bis-bipyridinium cyclophane-functionalized ion-sensitive field-effect transistor

for the sensing of adrenaline, Anal. Chem. 71, 1999, 5441-5443.

Kharitonov, A.B., Zayats, M., Lichtenstein, A., Katz, E., Willner, I., Enzyme monolayer-functionalized field-effect transistors for biosensor applications, Sensors and Actuators B., 70, 2000, 222-231.

5 Powner E.T., Yalcinkaya F., Intelligent Biosensor, Sensor Review, Vol.17, No.2,1997, pp.107-116.

Senillou, A., Jafferezic-Renault, N., Martelet, C., Cosnier, S, A miniaturized urea sensor based on the integration of both ammonium based urea enzyme field effect transistor and a reference field effect transistor in a single chip, Talanta 50,
10 1999, 219-226.

Sze, S.M., Semiconductors Sensors, Wiley, New York, NY, 1994, pp. 127-8.

Turner, A.P.F., Karube, I. And Wilson, G.S., Biosensors, Fundamentals And Applications, Oxford University Press, Oxford, 1987, p.5.

Wise, D.L., Applied Biosensors, Butterworths, London, 1989, pp. 93-114.

15

BACKGROUND OF THE INVENTION

The Integration of biologically active molecules with electronic transducers has emerged as an elegant and effective way of creating high fidelity systems for the detection of a wide range of biological activities (Turner, 1987;
20 Gopel, 1994; Cahn, 1991). The aim of such biological sensory systems is the production of an electrical signal which is proportional to the concentration of a certain biochemical agent, and thus reflects the level of biochemical activity of the biocatalyst involved (Powner, 1997). Such systems serve as translators of biological events into electrical signals and can prove to be the link between the
25 much-understood world of silicon-based electronics and the biological world.

The high specificity of biomolecules such as enzymes, antibodies, etc. allows for the creation of reaction-specific biosensory systems that can be used for a wide array of applications (Coulet).

A review of sensor technology may be found in Sze (1994). One type of
5 sensor technology prepared in the past concerns the use of ion-sensitive field-effect transistor (ISFET) in which the normal metal-oxide-silicon field-effect transistor (MOSFET) gate electrode is replaced by an ion-sensitive membrane with the ability to detect ion concentrations in solution (Wise, 1989), as schematically shown in Fig. 1.

10 Enzyme-based sensory systems such as the traditional enzyme-based field-effect transistors (ENFET) and enzyme-electrodes have also been described in the past (Jimenez, 1997; Senillou, 1999; Gorchkov, 1997; Kharitonov, 1999, 2000).

SUMMARY OF THE INVENTION

15 It has been found, according to the present invention, that a Field Effect Transistor, FET, device can serve as a sensor for molecules in solution and air, and can specifically monitor catalytic activity of an enzyme assembled thereon.

The present invention, by one of its aspects, provides a device for the detection of analyte molecules, the device being a Field Effect Transistor (FET)
20 comprising a gate electrode coated with a layer of receptor molecules that in the presence of said analytes can catalyze a reaction that causes release of ions in a medium surrounding said receptor molecules, and a monolayer of linker molecules linking said receptor molecules to said gate such that the distance between the receptor molecules layer and the surface is smaller than 15\AA . In accordance with a
25 preferred embodiment, the FET is an Ion-Sensitive FET (ISFET).

The receptor molecules are preferably enzyme molecules. One specifically preferred enzyme is acetylcholine esterase (AChE).

ABBREVIATIONS

ISFET- Ion-sensitive field effect transistor; CyC- Cyanuric chloride; I_{ds} -
drain-source current; TSA- topotactic self-assembly; ACh- Acetylcholine; AChE-
5 Acetylcholine esterase; DTNB- 5,5'-dithio-bis (2-nitrobenzoic acid); TNB-
thionitrobenzoic acid.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more fully understood and appreciated from
the following detailed description, taken in conjugation with the examples and
10 drawings, in which:

Fig. 1 shows a standard metal-oxide-silicon field-effect transistor (MOSFET,
left) and an Ion-Sensitive Field Effect Transistors (ISFETs, right). In an ISFET
the metal oxide gate electrode is replaced by an ion sensitive membrane by which
changes in ionic concentrations in solutions induce a change in ISFET
15 transduction that can be measured by drain-source current (I_{ds}).

Fig. 2 shows the stepwise construction of the layered structure. In step (A),
Cyanuric Chloride is reacted with the oxide layer of the ISFET gate surface to
form covalent linkage. In step (B), the covalently bound cyanuric chloride layer
forms a covalent linkage (arbitrary Lysine residue of enzyme) the enzyme.

20 Fig. 3 shows the experimental Ψ and Δ as a function of wavelength for a
monolayer of CyC on Silicon substrate. Based on the complete fitting between
the model and experimental results as shown in this Figure, the thickness of the
layer was determined.

Fig. 4 shows the UV-Vis absorption spectrum of TSA derived CyC monolayer
25 on quartz substrate.

Fig. 5 shows the absorption spectra of 1.25×10^{-4} M of ACh and 5×10^{-5} M

DTNB solution before (having a peak at 410 nm) and after (having a peak at 325 nm) a 15-minute exposure to AChE containing substrate.

Fig. 6 shows the absorption spectra of 1.25×10^{-4} M ACh and 5×10^{-5} M DTNB solution exposed to AChE containing substrate, recorded in-situ at 20-second
5 interval.

Fig. 7 represents the optical density at 410nm versus time following the insertion of a glass substrate containing immobilized AChE into 2.5×10^{-4} M ACh and 5×10^{-5} M DTNB solution.

Fig. 8 shows Reaction velocity verses ACh concentration for the surface-bound
10 AChE.

Fig. 9 represents a graphical determination of K_m and V_{max} for the surface bound AChE.

Fig. 10 represents the hydrolysis of acetylcholine to choline in the presence of AChE in water. The reaction results in the generation of acetic acid and
15 protonation of the solution.

Fig. 11A-B show substrate dependency of ISFET responsiveness: (A) Ach-Iodine dosage response, and (B) basic characterization shows a substantial change in the ISFET transduction and amplification (dI/dV).

Fig. 12A-B show the effects of AChE inhibition by Eserine on I_{ds} . (A) Eserine
20 was injected to the buffer solution at $t = 75$ and at $t = 400$ sec. Acetylcholine was not washed from solution. A major decrease in I_{ds} of the enzyme modified ISFET was observed and a return to a lower I_{ds} level occurred within 50 sec of application. (B) Eserine had very little effect on non enzyme modified ISFET. Acetylcholine was injected at $t = 230$ and at $t = 400$ sec and showed I_{ds} increase.
25 Eserine was injected at $t = 610$ sec and showed similar effects, suggesting response of non-enzyme modified ISFET is merely an artifact.

Fig. 13 depicts the ISFET long term fidelity. AChI-induced response has been measured after 1 month at 4°C and no apparent deterioration of enzyme layer was observed. (AChI was applied at $t = 50$ and at $t=200\text{sec.}$).

5 DETAILED DESCRIPTION OF THE INVENTION

In the following, the invention will be illustrated in reference to some non-limiting specific embodiments.

Fig. 1 illustrates MOSFET and ISFET structures suitable to be used in a device of the present invention for the detection of molecules. Generally, the device of the present invention is a FET, in which a gate is formed with a layer of enzyme molecules capable of catalyzing a reaction that causes release of ions in a media surrounding said enzyme, and a monolayer of linker molecules linking said enzyme to said gate such that the distance between the enzyme and the surface is smaller than 15\AA .

15 The media surrounding said enzyme may be air, water, sea water, buffer solution, ionic solution and others.

Fig. 2 exemplifies how a conventional FET (ISFET in the present not limiting example) can be modified to obtain the device of the present invention. As shown, the gate surface layer Al_2O_3 is coated with cyanuric chloride (constituting linking molecules) which covalently binds to the oxide atoms and is then reacted with the AChE (constituting receptor molecules) which binds covalently to the linking molecules through one of the reactive functional groups of the enzyme.

The enzyme may be a natural or synthetic, preferably selected from the following: proteases, lipases, RNases, DNases, peptidases, glucose oxidase, urease, 25 chymotrypsin, butyrylcholine esterase and acetylcholine esterase. More preferably, the enzyme is acetylcholine esterase, herein designated AChE.

The ion sensitive oxide coat (gate surface layer) may be Aluminum Oxide (Al_2O_3), Silicium Nitride (Si_3N_4), Indium Oxide-Titanium Oxide ($\text{In}_2\text{O}_3\text{-TiO}_3$), Silicon Oxide (SiO_2) or Tantalum Oxide (Ta_2O_5).

The linker molecules are positioned between and covalently bound to both the oxide-coat of the gate and the receptor molecules layer (e.g., enzyme). The linker molecules are preferably selected from conjugated or unconjugated aliphatic, aromatic or heteroaromatic molecules, having at least one functional group capable of covalently binding to said surface and at least one functional group capable of covalently binding to said receptor molecules (enzyme). The term "heteroaromatic" refers to aromatic compounds containing one to three heteroatoms selected from N, O and/or S. The heteroaromatic molecules are for example, and without limiting to pyridyl, pyrrolyl, furyl, thienyl, imidazolyl, oxazolyl, quinoliny, thiazolyl, pyrazolyl, 1,3,4-triazinyl, 1,2,3-triazinyl, benzofuryl, isobenzofuryl, indolyl, imidazo[1,2-a]pyridyl, benzimidazolyl, benzthiazolyl, benzoxazolyl, and quinazoliny.

These linker molecules bind the receptor molecules to the surface such that the distance between the receptor and the surface is less than 15Å, preferably less than 10Å and most preferably less than 5Å.

Such linker molecules are for example and without being limiting to short chain aliphatic molecules or mono- or polycyclic aromatic or heteroaromatic molecules capable of forming a single compact layer on the surface of the gate. Surface binding functional groups may for example be halides, activated halides, trichlorosilanes, trialkoxysilanes or other similar groups capable of binding covalently to the surface of the device.

Receptor molecules' bonding groups, capable of binding to functional groups of the receptor molecules may for example be, without being limiting to, halides (i.e. I, Br, Cl), aldehydes, carboxylic acids, active esters, acyl halides and ketones.

The linker molecules are preferably heteroaryl compounds substituted by at least one surface-binding functional group and additionally by at least one enzyme-binding functional group, both functional binding groups are preferably labile groups.

The FET device according to the invention serves as an amplifier that translates the presence and concentration of the analyte molecules (i.e. molecules being tested for) on its surface into a change in the electrical current between the source and drain, I_{ds} .

5 The device of the present invention utilizing an ISFET operates in the following manner. When the receptor molecules (enzyme) on the top of the ion-sensitive layer of the ISFET is brought in contact with an inhibitor of the receptor molecules, free hydrogen ions are formed (as a reaction result), the surface potential on ion sensitive layer changes, thus influencing the current I_{ds} between the
10 drain and source, which makes this current I_{ds} directly related to the pH. The current changes can be detectable either by using a reference electrode screened from the environment (e.g., from the analyte molecules), or by utilizing a threshold-based programming means.

Enzyme-catalyzed reactions may alter the pH at the ISFET gate surface,
15 either positively, by the uptake of protons, or negatively, by the generation of protons. Such pH changes result in an electrical activity at the gate surface of the transistor and induce current changes between the drain and source electrodes, when the gate-source potential is kept constant.

In one embodiment of the present invention, the ISFET device comprises a
20 an aluminum oxide (Al_2O_3) gate which is covered with a layer of cyanuric chloride molecules and a layer of the AChE enzyme being covalently bound to the cyanuric chloride layer.

AChE catalyses the hydrolysis of acetylcholine, resulting in the generation of acetic acid and choline as shown in Fig. 10. The generation of acetic acid and
25 the acidification of the buffer solution induce a pH change that is recorded by the ISFET.

Examples of the various applications of the device of the present invention, without being limited to are: (1) detection of pesticides and herbicides in agriculture, (2) detection of residual natural and/or synthetic toxins, pesticides
30 and/or herbicides in water, (3) detection of residual natural and/or synthetic toxins,

pesticides and/or herbicides in food and food products, (4) detection of synthetic toxins emitted from industrial plants in the air and water, (5) detection of chemical warfare agents, and (6) detection of AChE inhibitors, or agonists.

By utilizing an array of differently coated gates, either associated with the same source-drain pair, or relating to different FETs, such that each gate is composed of a different receptor molecules layer, different analyte molecules can be detected.

The invention further relates to a method of detecting analyte molecules and measuring their concentration in air or in solution, e.g., water, sea water, buffer or ionic solution. The method comprises:

- (i) exposing the device as disclosed hereinbefore or an array thereof to a medium suspected of containing analyte molecules capable of reacting with the receptor molecules, and
- (ii) monitoring the change in the current measured at a constant or variable electric potential applied between the source and drain, and determining the presence of said analyte.

The determination may be qualitative, although the extent of change may serve as a quantitative measure for the level of said analyte in the medium.

The invention will be further illustrated by the following non-limiting examples.

EXAMPLES

General

Acetylcholine esterase (C1682, taken from electric eel), acetylcholine-iodine, acetylcholine-chloride, cyanuric chloride and eserine (physostigmine), were purchased from Sigma and were used as supplied.

Measurements were taken in a standard phosphate buffer (PBS), and physiological solutions at room temperature.

Example 1: Solid-State Assembly of Cyanuric Chloride (CyC) on Glass, Quartz and Silicon

In order to study the structure-activity relationship and enzyme activity, chemisorption of cyanuric chloride (CyC) was carried out on glass, quartz and
5 silicon wafers. The chlorides of the CyC are very labile and can undergo fast nucleophilic substitution reaction with the substrate (hydroxy containing surfaces) via topotactic self-assembly (TSA).

In this method the substrate (1 inch^2 , active area of 1 mm^2) is positioned on a spin-coater holder and wetted with a 0.1 M solution of CyC dissolved in
10 dichloromethane. Spinning at 4000 rpm for 30 seconds resulted in a physisorbed layer of about 60-80 nm in thickness. The covalent bonding onto the surface is achieved by introducing the coated substrate into a vacuum oven (3 mTorr) at 74°C for 10 minutes. These conditions are the optimized balance between the surface reaction kinetics and the sublimation rate of CyC. As the TSA assembly
15 is a self-cleaning solvent-less surface reaction, a mono-molecular layer is obtained.

Contact angle measurement of water on the substrate after monolayer assembly gave a wetting angle of -77° as compared with the low wetting angle of -15° obtained with the clean unassembled substrate. Such a high contact angle is
20 characteristic of a hydrophobic interface lacking the ability to form hydrogen bonds with the water droplet. Additionally, it shows a pinhole free monolayer coverage with no hydrophilic interaction with the under laying substrate.

Variable angle spectroscopy ellipsometry (VASE) of the CyC monolayer showed a thickness of 6.7\AA for this layer on top of 18\AA thick oxide layer. The
25 derived ellipsometric thickness suggests that the alignment of the coupling molecule is perpendicular to the surface and is composed of a single monolayer.

Fig. 4 shows the UV-Vis absorption spectrum of the CyC monolayer. The ν_{max} at 230nm corresponds to the CyC absorption while the OD suggests a molecular number density in the order of $10^{14} \text{ molecules/cm}^2$.

Example 2: Surface Anchoring of Acetylcholinesterase (AChE)

A stock solution of the enzyme is prepared by mixing 10 μ l AChE with 100 μ l PBS buffer at pH=7.4. The condensation reaction with the enzyme is obtained by placing a 10 μ l the enzyme solution on the CyC containing substrate in a covered pettri dish for 10h at 16°C. The unreacted enzyme is then washed off with PBS buffer at pH=7.4, three times. Substrates containing immobilized enzyme were kept under buffered solution at 16°C prior performing the various characterization tests.

To examine whether the immobilization procedures rendered the enzymatic activity, the following experiments were performed.

(i) Enzyme Activity by Ellman's Method.

In this test, the enzyme activity is measured by following the increase of yellow color produced from the reaction of thiocholine with the DTNB ion (Sawada, O., Ishida, T., Kihachiro, H., J. Biochem., 129, 2001, 899-907) .

The reaction of acetylthiocholine-iodide with DTNB (5,5'-dithio-bis (2-nitrobenzoic acid) marker was conducted by emersing the solid substrate containing the immobilized AchE, obtained above, in an optical cell compatible with the spectrophotometer. The rate of color production was measure at 410nm. All of the investigated solutions were freshly prepared: ACh in phosphate buffer of pH=8.0 and the DTNB dissolved in PBS buffer of pH=6.5.

The enzyme activity was probed by two methods: Ex-situ and In-situ experiments. In the Ex-situ experiments the solution of the marker containing ACh is measured before and after the exposure to the immobilized AChE substarte. The optical cell contains a solution composed of 2ml of $2.5 \cdot 10^{-3}$ M ACh and 2ml of $1 \cdot 10^{-4}$ M DTNB. The optical spectra were recorded before and after 15 min of the immobilized enzyme solution insertion to this optical cell. In the In-situ experiments, the substrate is immersed in the optical cell containing

various concentrations of the DTNB/ACh solution. The hydrolysis product was followed in two ways: (a) by recording the spectra in fixed time interval and (b) by the time course mode at 410nm.

Fig. 5 shows the appearance of the 410nm peak of TNB, the reaction product of DTNB and thiocholine and the absorption of DTNB at 325nm before the exposure to the enzyme containing substrate.

Fig. 6 demonstrates the progress of the reaction by the decrease in DTNB absorption and the increase in TNB absorption. The existence of an isosbestic point at 360nm confirms the direct transformation between the two species.

The determination of AChE activity was conducted by probing in real time the absorption of the TNB product at 410 nm. Fig. 7 exemplified the bio-catalytic activity of the surface bound AChE on the hydrolysis of ACh (in a given concentration) to yield thiocholine. The hydrolysis kinetics is characterized by an initial fast hydrolysis ("the linear regime") that levels-off with the total consumption of the marker by the hydrolysis product. The slope of the "linear" part ($\Delta A/\Delta t$) can yield the reaction velocity in M/sec.: where $\Delta A = \epsilon \times \Delta C \times l$ ($\epsilon = 14150 \text{ M}^{-1} \cdot \text{cm}^{-1}$ at 412nm and $l = 1\text{cm}$).

(b) Reaction Velocity

Repeating the experiment with different ACh concentrations was conducted in order to give the reaction velocity dependence on the substrate concentration as shown in Figure 8. In these experiments the DTNB concentration was kept constant ($5 \times 10^{-5} \text{ M}$).

This bio-catalytic activity of the surface-bound AChE fits the Michaelis-Menton model for enzyme kinetics. At constant enzyme concentration the reaction velocity reaches a saturation value, which is defined as V_{max} . This is consistent with the fact that the number of active sites in the sample is constant and can't react faster with the increase in substrate concentration.

Michaelis-Menton model's defines K_m as the substrate's concentration that yields half the velocity of V_{max} . A Lineweaver-Burk plot, shown in Fig. 9, was used for the graphical extraction of these kinetic parameters (see Figure G). The linear regression of the data in the Lineweaver-Burk plot yield: $K_m = 3.1 \times 10^{-4} M$ and $V_{max} = 1 \times 10^{-7} M \text{ sec}^{-1}$, it is worth noting that these values are highly dependent on the experimental conditions such as pH, temperature and ionic-strength.

These tests indicate that the covalent assembly of AChE to a glass substrate via CyC coupling layer preserved the bio-catalytic activity of the enzyme towards the hydrolysis of ACh. This may be concluded from the V_{max} and K_m values that are comparable to those of the free enzyme in solution.

Example 3: ISFET Device Fabrication

ISFETs were first rinsed with isopropanol and dried under Argon. A solution of 0.1M cyanuric chloride (in dichloromethane) was prepared and then applied to the Al_2O_3 gate surface of the ISFET. ISFETs were then dried with Argon and heated at 70°C for 15 minutes, then rinsed again with dichloromethane and dried under Argon. Acetylcholine esterase, 0.1M, was applied onto the modified gate surface and left for 1hr at room temperature, and then rinsed with PBS.

Example 4: The Measurements

The resulting hybrid system of Example 3, was immersed in a PBS solution as a background electrolyte for the measurements. A standard Ag/AgCl electrode was used as the reference electrode. The current between source and drain electrodes (I_{ds}) was measured, while potential between drain and source electrodes (V_{ds}), and between the gate and source electrodes (V_{gs}) were kept constant at 0.1V and 0.45V, respectively, recording the electrical activity occurring at the gate surface.

The substrate dependence of the drain-source current recorded by the modified ISFET correlates with normal enzyme activity analysis and is shown in Fig. 11A. The modified ISFET showed responsiveness at concentrations of as low as at 10^{-8} M. The response plateau at concentrations in the range of 1mM (not shown). Basic characterization of ISFET transduction was carried out before and after ACh-Iodine or ACh-chloride application (Fig. 11B). A substantial increase in ISFET transduction was observed in correlation with dosage response.

The application of eserine - a reversible acetylcholine esterase inhibitor (Used for medical purposes) - to the solution (without washing Ach^+) resulted in a major decrease of drain-source current (Fig. 12A). Return of I_{ds} to levels was slightly lower than those before the application of eserine. These results may indicate that the acidification of the solution by the hydrolysis of acetylcholine is halted by eserine only locally, e.g. the esterase activity is halted until sufficient amounts of substrate is diffused to the gate area. Eserine is charged at physiological pH, a fact that could have explained the decrease in I_{ds} . However, the application of eserine onto a non-enzyme-functionalized ISFET has been shown to have opposite effects (Fig. 12B). A minor increase in I_{ds} was recorded which strengthens the suggestion that the effect of eserine is due the inhibition of enzyme activity. Furthermore, the reversible nature of AChE inhibition by eserine correlates with the current increase and may explain this phenomenon.

The long-term fidelity of the enzyme-functionalized ISFETs was also analyzed. ISFETs responsiveness has shown no major decrease in after 30 days in $4^{\circ}C$ (Fig. 13). Such high fidelity is non-existent in traditional enzyme based sensors and offers stability and reuse of sensor.

The response time of the sensor is reflected by the amount of time it takes for I_{ds} to reach steady state after the application of the substrate. The average response time of the enzyme modified ISFET was measured under different concentration and was found to be approximately 35 seconds. The

— 15 —

response time under low substrate concentrations ($10\mu\text{M}$ - $50\mu\text{M}$) was lower than response time under high concentrations ($100\mu\text{M}$ and above).

CLAIMS:

1. A device for the detection of analyte molecules, the device being a Field Effect Transistor (FET) comprising a gate electrode coated with a layer of receptor molecules that in the presence of said analytes can catalyze a reaction that causes release of ions in a medium surrounding said receptor molecules, and a
5 monolayer of linker molecules linking said receptor molecules to said gate such that the distance between the receptor molecules layer and the surface is smaller than 15Å.
2. A device according to claim 1, wherein the Field Effect Transistor is an Ion
10 Sensitive Field Effect Transistor.
3. A device according to any one of claims 1 or 2, wherein the receptor molecules are enzymes or peptides.
4. A device according to claim 3, wherein the receptor molecules is acetylcholine esterase.
- 15 5. A device according to any one of claims 1 to 4, wherein said analyte molecules are selected from chemical agents used in agriculture, in environmental applications, industry and chemical warfare.
6. A device according to claim 5, wherein said chemical agents are pesticides, herbicides, nerve agents and synthetic or natural toxins emitted from industrial
20 plants.
7. A device according to any one of claims 1 to 6, wherein said gate electrode is an ion sensitive oxide gate.
8. A device according to claim 7, wherein the ion-sensitive oxide is Aluminum Oxide (Al_2O_3), Silicium Nitride (Si_3N_4), Indium Oxide-Titanium Oxide
25 ($\text{In}_2\text{O}_3\text{-TiO}_3$), Silicon Oxide (SiO_2) or Tantalum Oxide (Ta_2O_5).
9. A device according to claim 1, wherein said linker molecules are covalently bound to at least one of the surface or the receptor molecules.
10. A device according to claim 7, wherein said linker molecules are selected from conjugated or unconjugated aliphatic, aromatic or heteroaromatic

molecules, having at least one functional group capable of covalently binding to said surface and at least one functional group capable of covalently binding to said receptor molecules (enzyme).

11. An array of differently coated gates, either associated with the same
5 source-drain pair, or relating to different FETs, such that each gate is composed of a different receptor molecules layer.
12. A method of detecting analyte molecules and measuring their concentration in air or in solution, said method comprises:
 - 10 (i) exposing the device as disclosed hereinbefore or an array thereof to a medium suspected of containing analyte molecules capable of reacting with the receptor molecules, and
 - (ii) monitoring the change in the current measured at a constant or variable electric potential applied between the source and drain, and determining the presence of said analyte.
- 15 13. A method according to claim 10, wherein said solution is water, sea water, buffer or ionic solution.

For the Applicants
REINHOLD COHN AND PARTNERS
By: 

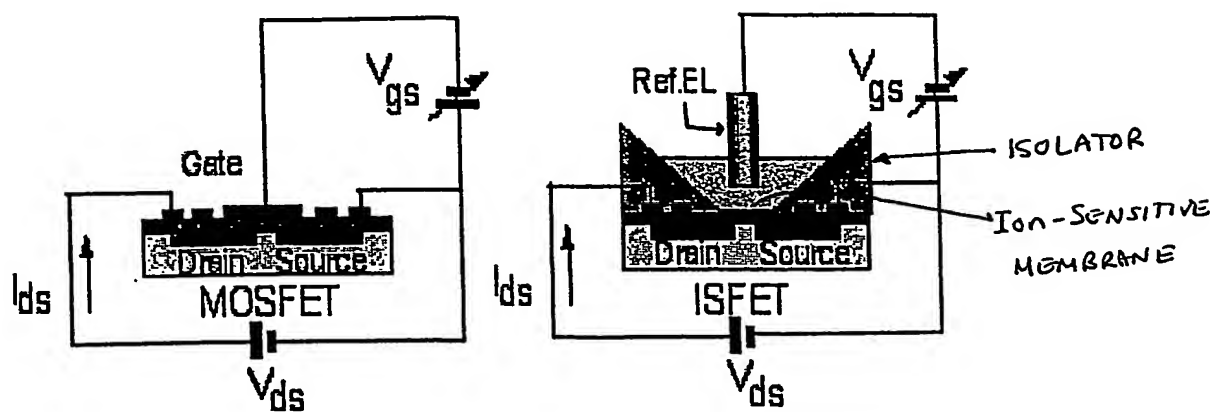


Fig. 1

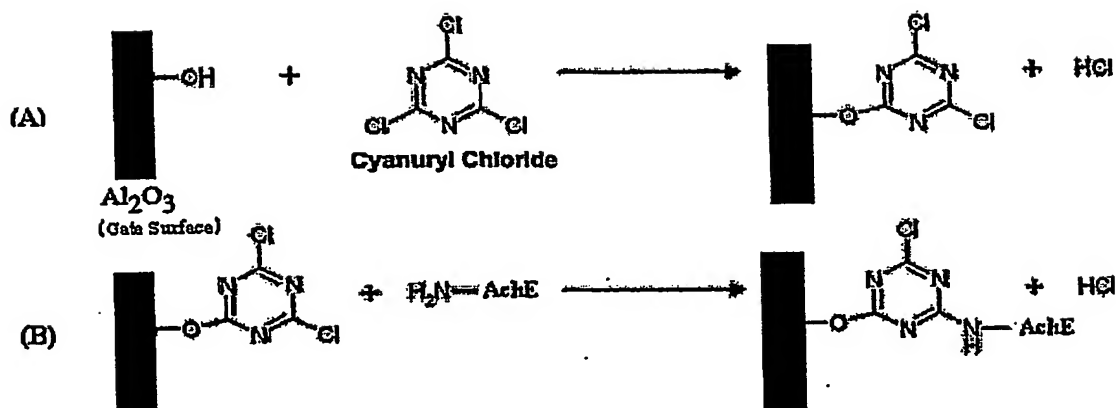


Fig. 2

2/8

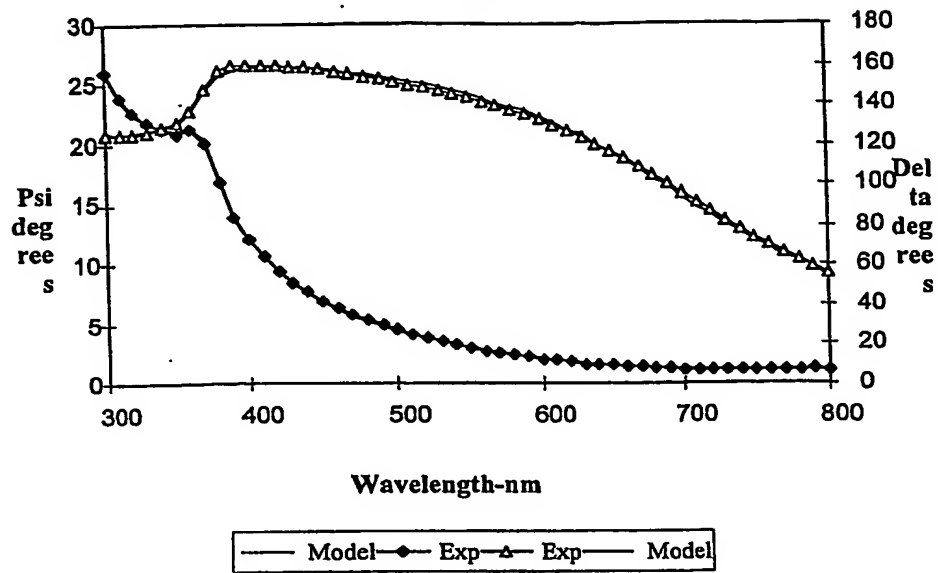


Fig. 3

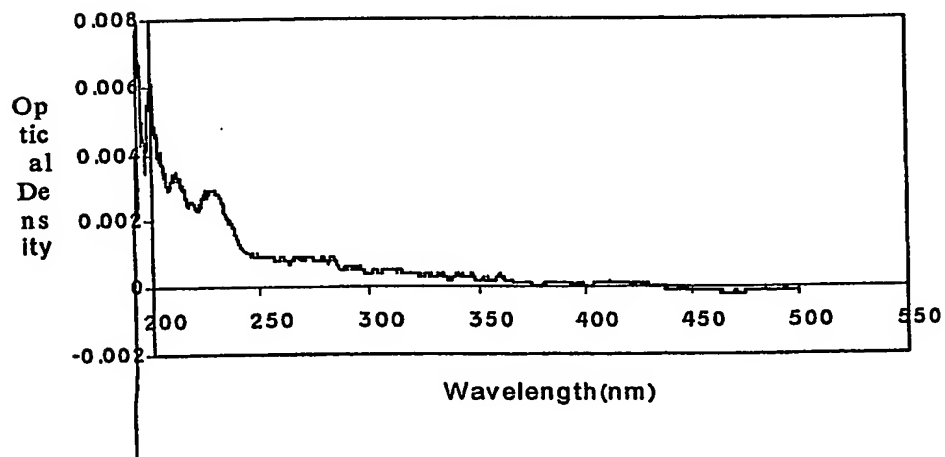


Fig. 4

3/8

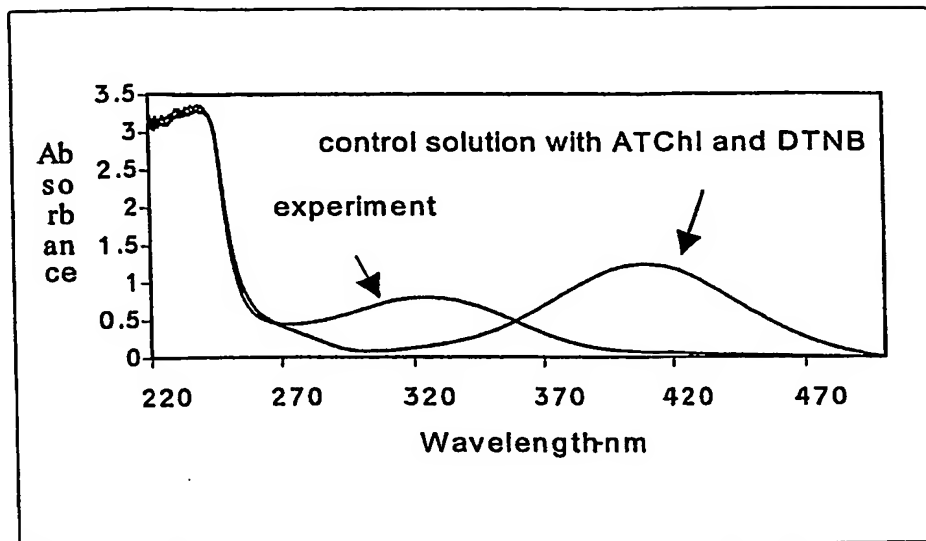


Fig. 5

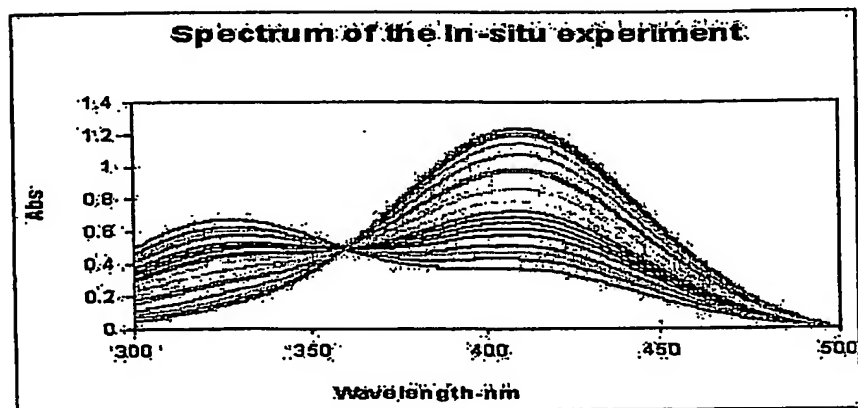


Fig. 6

4/8

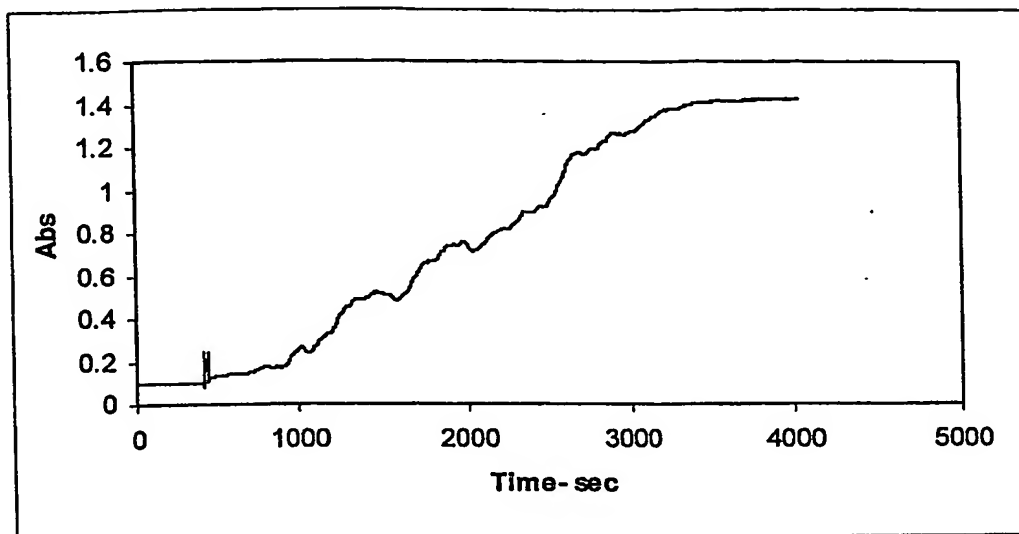


Fig. 7

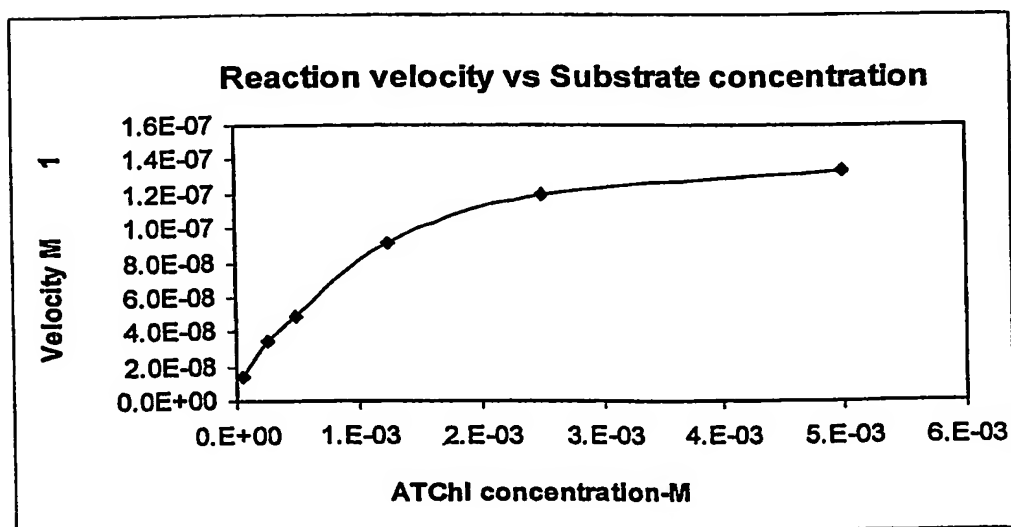


Fig. 8

5/8

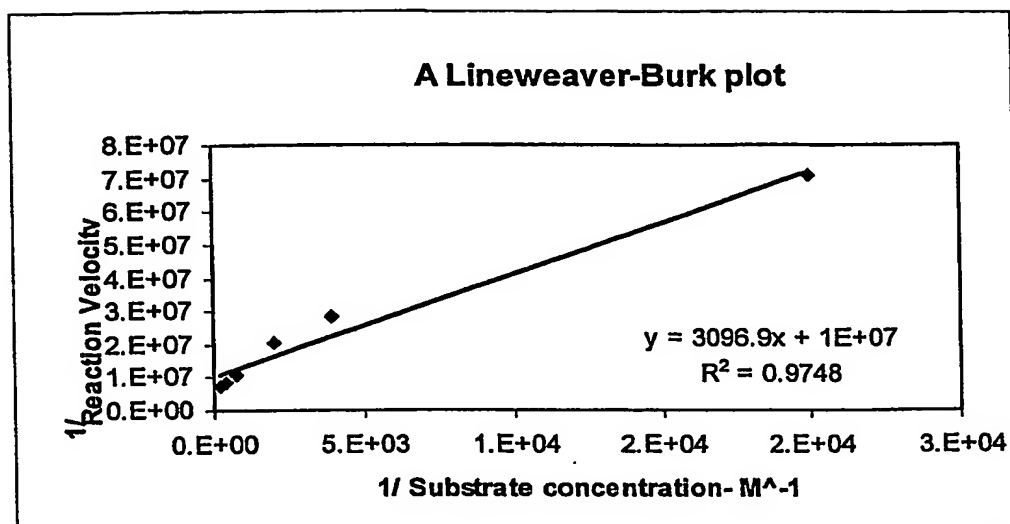


Fig. 9

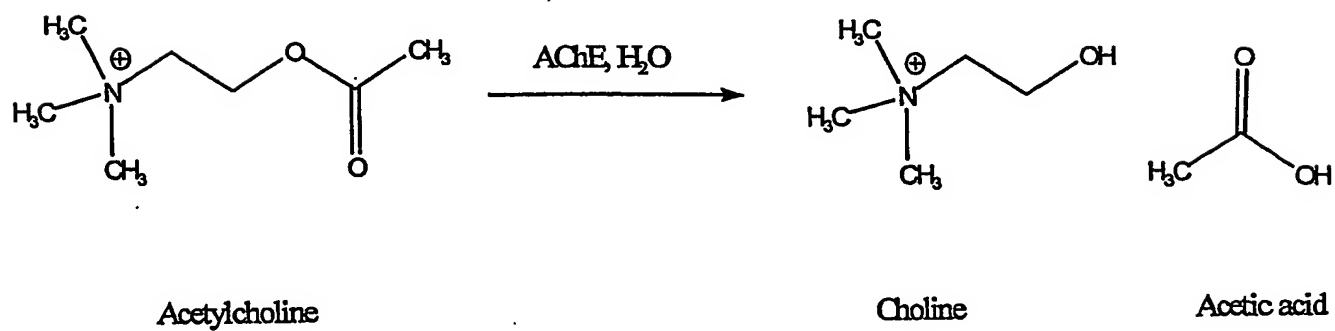


Fig. 10

6/8

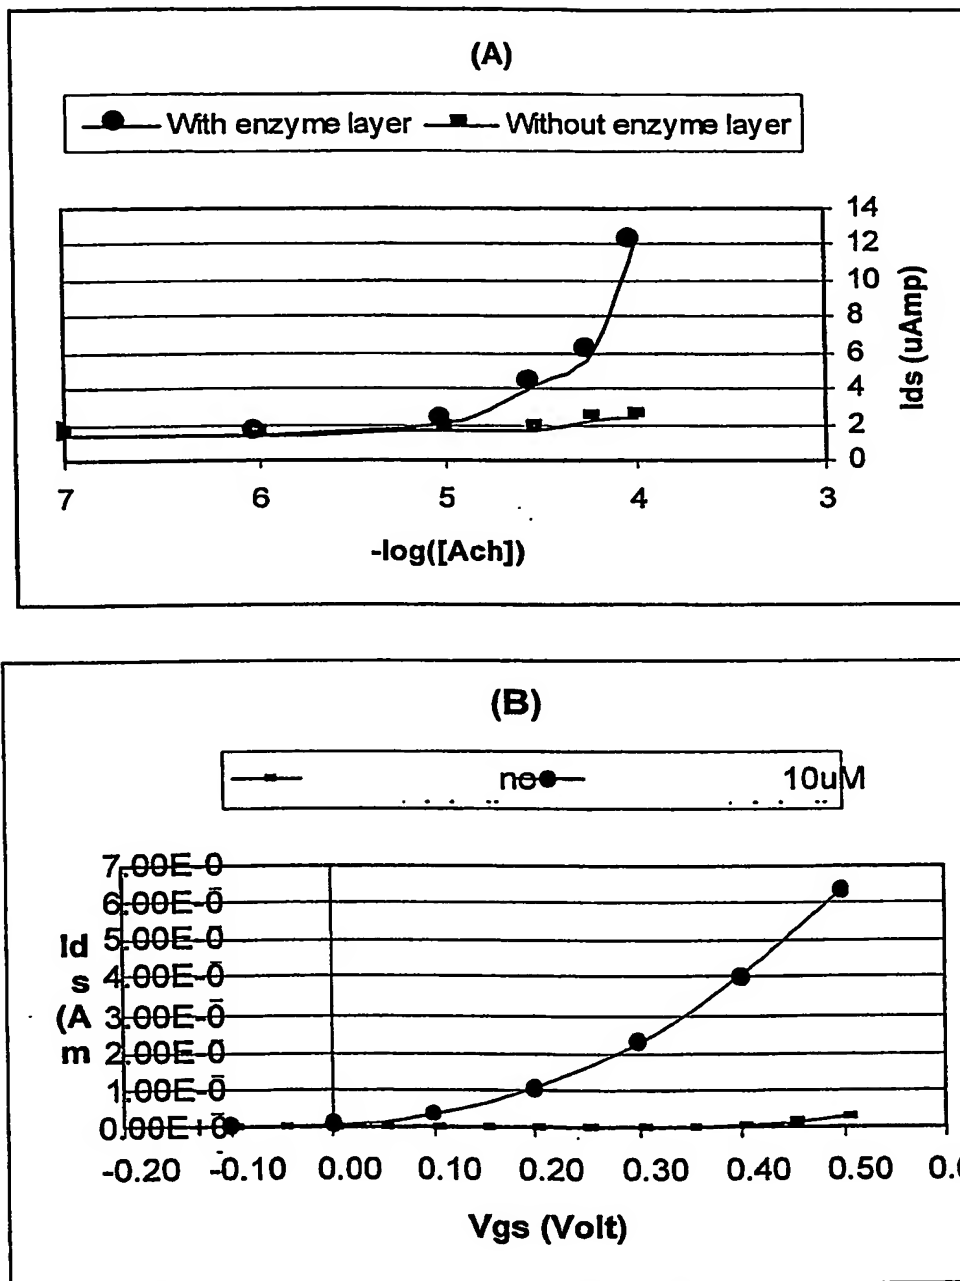


Fig. 11

7/8

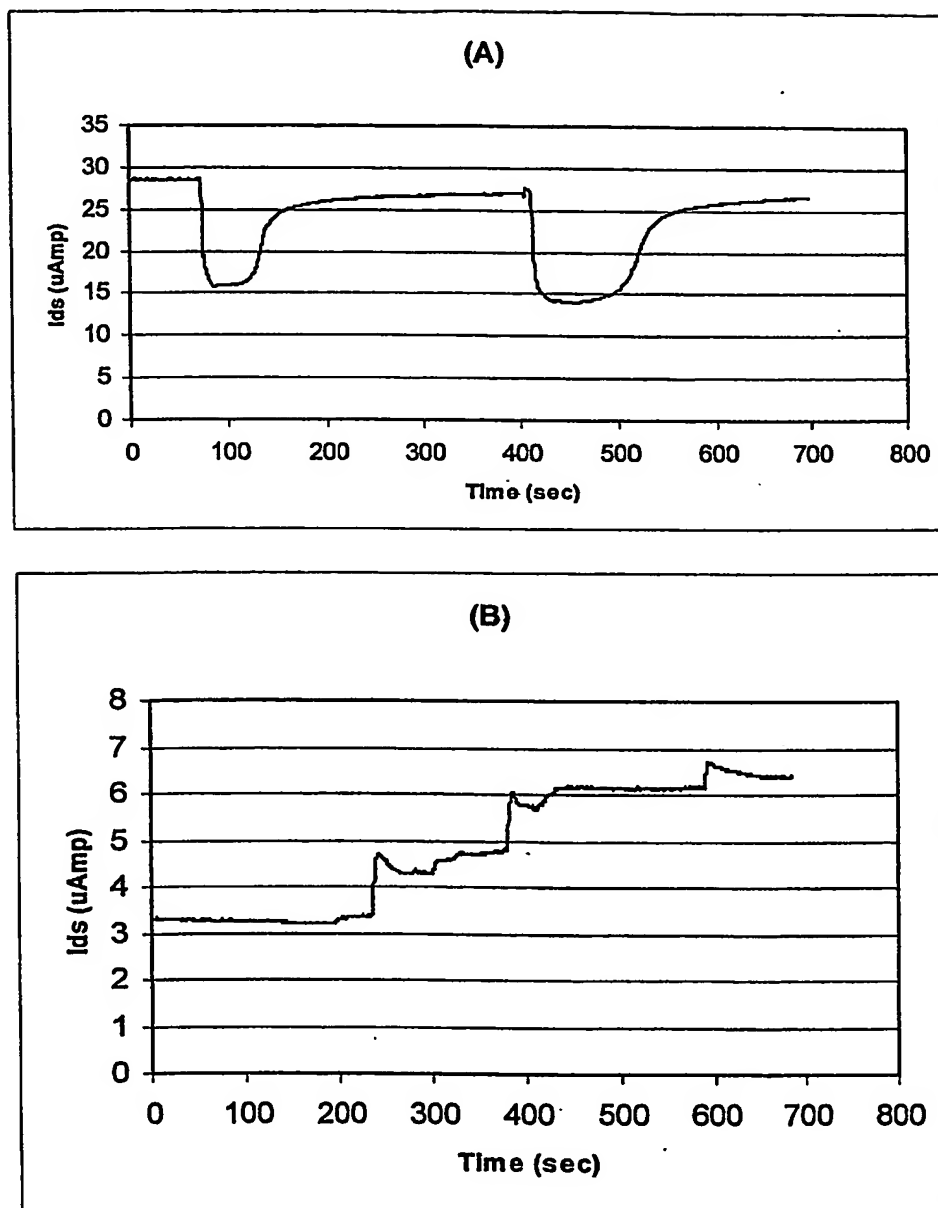


Fig. 12

8/8

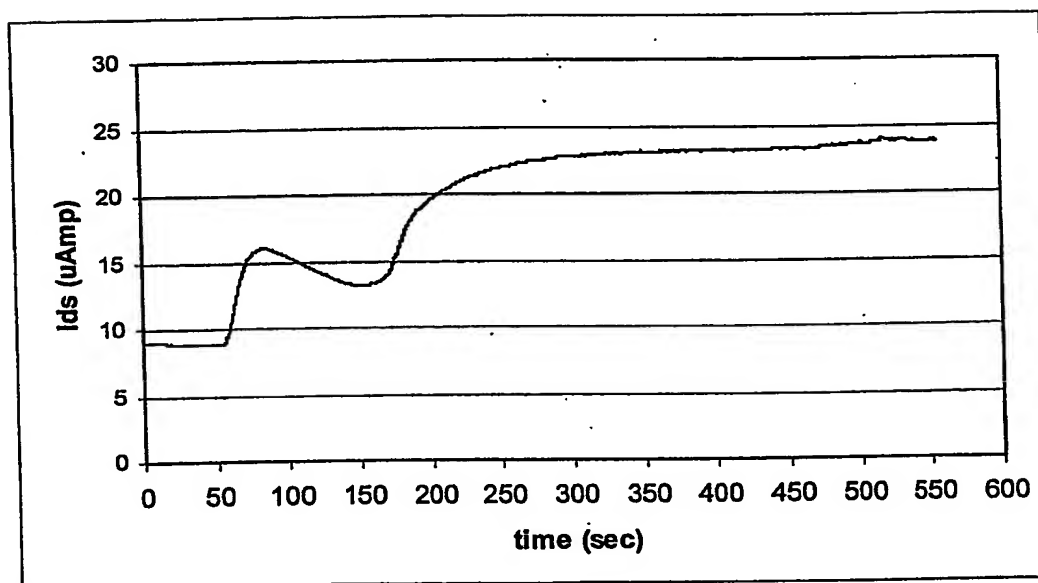


Fig. 13

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.